


Rolamento de agulhas BRI142620-U-IKO - BRI142620-U-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/bri142620-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

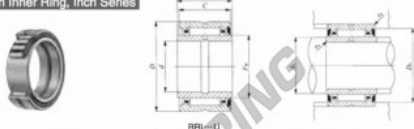

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)				
	With two seals	With one seal		d	D	C	B	
22.225 ($\frac{7}{8}$)		BRI 142620 U	177	22.225 (1 $\frac{1}{2}$)	41.275 (1 $\frac{3}{4}$)	31.750 (1 $\frac{1}{4}$)	32.000	
F_w	Standard mounting dimensions (mm)			Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring LRBZ 141820 B	
	Min.	Max.	Max. as max. ⁽¹⁾					
28.575 (1 $\frac{1}{4}$)	27	27.5	36.0	34 900	49 900	7 000		

Notes:
(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark:
1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952382555
Diâmetro interior	22.225 mm
Diâmetro exterior	41.275 mm
Espessura	31.75 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE