


Rolamento de agulhas GBR1223520-UU-IKO - GBR1223520-UU-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri223520-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

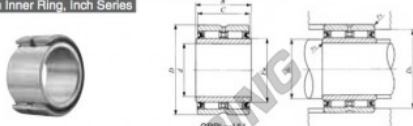

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
34.925 (1 3/8)	GBR1 223520 UU		311	34.925 (1 3/8)	55.562 (2 1/8)	31.750 (1 1/4)			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
32.000	41.275 (1 5/8)	40.2	40.2	50.5	0.6	56 600	105 000	1 900	LRBZ 222620

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952383439
Diâmetro interior	34.925 mm
Diâmetro exterior	55.562 mm
Espessura	31.75 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE