


Rolamento de agulhas GBRI446828-UU-IKO - GBRI446828-UU-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri446828-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

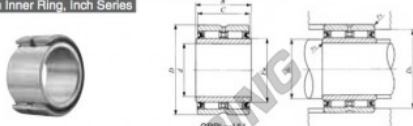

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) g | Boundary dimensions mm(inch) | | | | | |
|----------------------------|-----------------------|-----------------------------------|---------------------|------------------------------|-------------------------------------|---|--|----------------------|------------------------------------|
| | With two seals | With one seal | | d | D | C | | | |
| 69.850 (2 3/4) | GBRI 446828 UU | | 1 490 | 69.850 ± 0.010 | 107.950 ± 0.010 | 44.450 ± 0.010 | | | |
| B | F _w | Standard mounting dimensions - mm | | | Basic dynamic load rating C N | Basic static load rating C ₀ N | Allowable rotational speed ⁽²⁾ rpm | Assembled inner ring | |
| | | Min. | Max. | D ₁ Max. | | | | | r _{as max} ⁽¹⁾ |
| 44.700 | 82.550 ± 0.010 | 77 | 79 | 99.9 | 1.5 | 127 000 | 231 000 | 950 | LRBZ 445228 |

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3663952383590 |
| Diâmetro interior | 69.85 mm |
| Diâmetro exterior | 107.95 mm |
| Espessura | 44.45 mm |
| Embalagem | 1 |

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE