


## Rolamento de agulhas GBRI487232-UU-IKO - GBRI487232-UU-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri487232-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

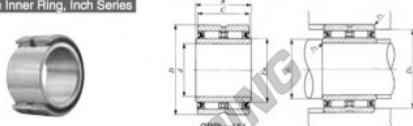

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
76.200 (3)	GBRI 487232 UU		1 880	76.200 (3)	114.300 (4 1/2)	50.800 (2)			
B	F <sub>w</sub>	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
51.050	88.900 (3 1/2)	83.5	86	106.3	1.5	170 000	347 000	900	LRBZ 485632

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: The outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952383606
Diâmetro interior	76.2 mm
Diâmetro exterior	114.3 mm
Espessura	50.8 mm
Embalagem	1
Padrão	Nenhuma norma

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE