


Rolamento de agulhas GBRI122416-UU-IKO - GBRI122416-UU-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri122416-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

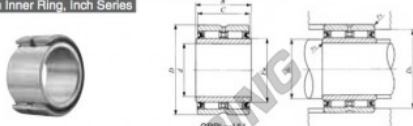

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
19.050 (3/4)	GBRI 122416 UU		143	19.050 (7/8)	38.100 (1 1/2)	25.400 (1)			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
25.650	25.400 (1)	24	24.4	33.3	0.6	31 000	46 100	3 000	LRBZ 121616

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952384610
Diâmetro interior	19.05 mm
Diâmetro interior	3/4" inch
Diâmetro exterior	38.1 mm
Diâmetro exterior	1 1/2" inch
Espessura	25.4 mm
Espessura	1" inch
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE