


## Rolamento de agulhas NBXI1223Z-IKO - NBXI1223Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/nbxi1223z-iko>

**LINEAR TYPE NEEDLE ROLLER BEARINGS**

Needle Bearings with Thrust Ball Bearing **With Inner Ring**  
Needle Bearings with Thrust Roller Bearing **With Inner Ring**

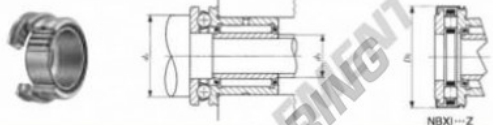

Identification number														
Mass (Ref.) g			With dust cover			Mass (Ref.) g			Mass (Ref.) g			d		
---			---			---			<b>NBXI 1223Z</b>				63   12	
Boundary dimensions mm					Shoulder diameter mm	Basic dynamic load rating C		Basic static load rating C <sub>0</sub>		Allowable rotational speed <sup>(1)</sup> rpm	Assemble			
B	H	I <sub>1</sub>	( <sup>1</sup> / <sub>2</sub> ) A <sub>min</sub> /A <sub>max</sub>	F <sub>w</sub>		d <sub>a</sub>	d <sub>b</sub>	Radial	Axial			Radial	Axial	
16.5	9	6.5	0.3	0.3	15	15	26	14	12 300	10 200	14 900	23 900	14 000	LRT 1

Minimum allowable value of chamfer dimension r  
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NBXI series.  
The outer ring has an oil groove and an oil hole.  
Grease is not prepacked. Perform proper lubrication.

### CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952390710
Diâmetro interior	12 mm
Diâmetro exterior	24 mm
Espessura	23 mm
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE