Rolamento de agulhas
NBXI1425Z-IKO - NBXI1425Z-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/nbxi1425z-iko

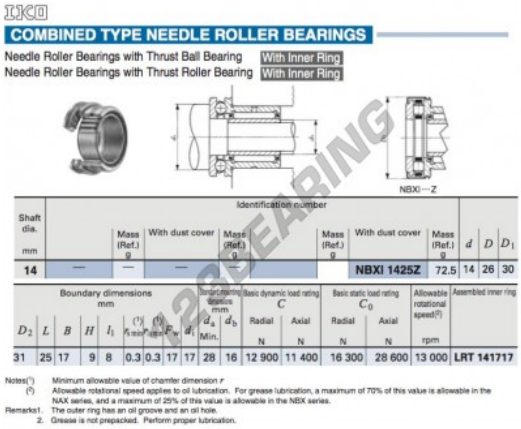

IKO

COMBINED TYPE NEEDLE ROLLER BEARINGS

Needle Roller Bearings with Thrust Ball Bearing — With Inner Ring
Needle Roller Bearings with Thrust Roller Bearing — With Inner Ring

NBXI···Z

Shaft dia. mm	Identification number	Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g	d	D	D_1
14	—	—	—	—			NBXI 1425Z	72.5	14	26	30

Boundary dimensions mm D_2	L	B	H	l_1	(1) $r_{1,min}$	(1) $r_{2,min}$	F_w	d_1	Standard mounting dimensions mm d_a Min.	d_b	Basic dynamic load rating C Radial N	Axial N	Basic static load rating C_0 Radial N	Axial N	Allowable rotational speed(2) rpm	Assembled inner ring
31	25	17	9	8	0.3	0.3	17	17	28	16	12 900	11 400	16 300	28 600	13 000	LRT 141717

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in the NAX series, and a maximum of 25% of this value is allowable in the NBX series.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Grease is not prepacked. Perform proper lubrication.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
N° Ean13	3663952390758
Diâmetro interior	14 mm
Diâmetro exterior	26 mm
Espessura	25 mm
Peso	50 g
Embalagem	-
Padrão	Nenhuma norma

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE