


## Rolo de leva com eixo CF8-R-IKO - CF8-R-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/cf8-r-iko>



### CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

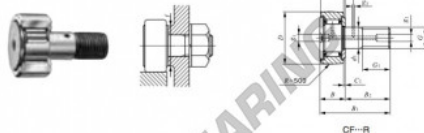

Stud dia. mm	Identification number				Mass (Ref.)				
	Shield type		Sealed type		g	D	C	d <sub>1</sub>	G
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
8	CF	8	R		28.5	19	11	8	M 8×1.25

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Ball dynamic load rating C N	Ball static load rating C <sub>0</sub> N	Maximum allowable static load N
G <sub>1</sub>	B	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>	r <sub>s</sub> max	(°)					
10	12.2max	32.2max	20	—	0.6	*4	—	0.3	13	6.5	4 250	4 740	4 620	

## CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952440996
Diâmetro interior	8 mm
Diâmetro exterior	19 mm
Espessura	11 mm
Peso	40 g
Embalagem	-
Padrão	-

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE