


Rolo de leva com eixo CFES16-BR-IKO - CFES16-BR-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/cfes16-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

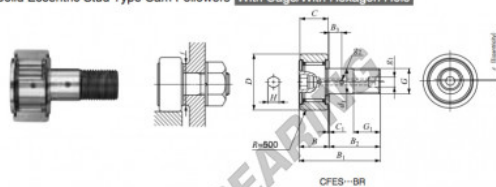

Stud dia. mm	Identification number								Mass (Ref.) g	D	C	d _i				
	Shield type				Sealed type											
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring									
16	CFES 16 BR								170	35	18	16				
Boundary dimensions mm																
G	G ₁	B max	B ₁ max	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε ⁽¹⁾ K _{max}	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M16×1.5	17	19.6	52.1	32.5	8	0.8	6	3	6	0.6	0.5	26	58.5	12 000	18 300	18 300

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952443614
Diâmetro interior	16 mm
Diâmetro exterior	35 mm
Espessura	18 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE