


Rolo de leva com eixo CR14-UUR-IKO - CR14-UUR-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/cr14-uur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

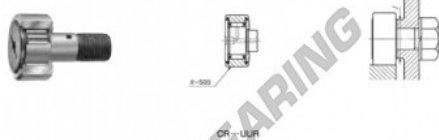

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type		Sealed type							
9.525 ($\frac{3}{8}$)	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring	46	22.225 $\frac{7}{16}$	12.700 $\frac{1}{2}$	9.525 $\frac{3}{8}$	7/8-24	9.525 $\frac{3}{8}$
	CR 14 UUR									
Boundary dimensions mm(inch)										
B max	B ₂	B ₃	C ₁	S ₁	S ₂	r	Bearing dimension f Min. mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C ₀ N	Basic static load rating C ₀ N
14.2 9/16	22.225 $\frac{7}{16}$	6.350 $\frac{1}{4}$	0.794 $\frac{1}{16}$	4.762 $\frac{3}{16}$	2.381 $\frac{3}{32}$	0.794 $\frac{1}{16}$	15.081 $\frac{5}{16}$	10.8	4.790	9.810

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060462886
Diâmetro interior	9.525 mm
Diâmetro exterior	22.225 mm
Espessura	12.7 mm
Peso	46 g
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE