


Batente de agulhas AZ15289-IKO - AZ15289-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/batente-agulhas/az15289-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

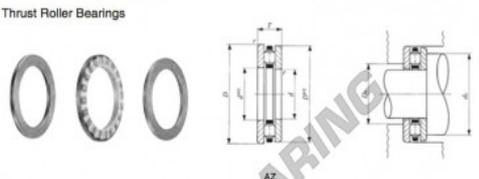

| Shaft dia. mm | Identification number | | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|----------------|----------------|---------------|-----|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g | |
| 15 | AZ 15289 | 28 | AZK 15283.5 | 9.4 | WS 1528 | GS 1528 | | 9.3 |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|------------------------|----|---|----------------|----------------|----------------|------|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d ₄ Min. | D ₄ Max. | N | N | rpm |
| 15 | 28 | 9 | 15.04 | 27.8 | 3.5 | 2.75 | 0.3 | 17 | 25 | 25 | 18 | 10 200 | 23 900 | 14 000 |

Notes: (1) Minimum allowable chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARACTERÍSTICAS DO PRODUTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3616060465887 |
| Diâmetro interior | 15 mm |
| Diâmetro interior | 0.591" inch |
| Diâmetro exterior | 28 mm |
| Diâmetro exterior | 1.102" inch |
| Espessura | 9 mm |
| Espessura | 0.354" inch |
| Peso | 28 g |
| Embalagem | 1 |

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE