


Rótula SI

DSSIL6-T-K-DURBAL - DSSIL6-T-K-DURBAL

<https://www.123rolamento.pt/rolamento-mancal/rotula/si/dssil6-t-k-durbal>

DSSIL6-T-K

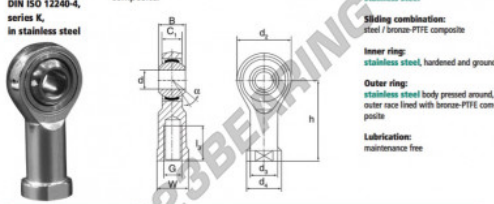

female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.

Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

order number	right hand thread	left hand thread	measurement [mm]						
DSSIL 6 T/K			d	G	B	C ₁	d ₂	d ₃	d ₄
			6	M 6	9	6,75	20	10,0	13

type	measurement [mm]			α	load rating C ₀ [kN]	weight [kg]
	l ₂ min	W	h			
DSSIL / DSSIL 6 T/K	12	11	30	13	7,7	0,022

CARACTERÍSTICAS DO PRODUTO

Marca	DURBAL
Nº Ean13	3663952491097
Diâmetro interior	6 mm
Diâmetro exterior	20 mm
Espessura	9 mm
Tipo	SI
Peso	22 g
Linha	Rosca esquerda
Lubrificação	sem
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE