Rótula SA
PM17-01-501-DURBAL - PM17-01-501-DURBAL

https://www.123rolamento.pt/rolamento-mancal/rotula/sa/pm17-01-501-durbal

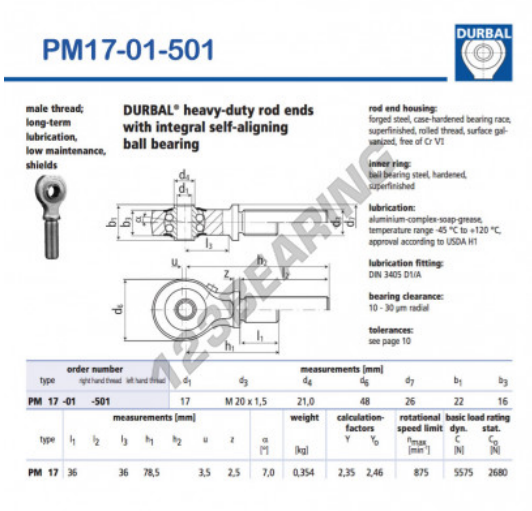

PM17-01-501

DURBAL

male thread; long-term lubrication, low maintenance, shields

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

rod end housing: forged steel, case-hardened bearing race, superfinished, rolled thread, surface galvanized, free of Cr VI

inner ring: ball bearing steel, hardened, superfinished

lubrication: aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting: DIN 3405 D1/A

bearing clearance: 10 - 30 µm radial

tolerances: see page 10

type	order number right hand thread	order number left hand thread	measurements [mm] d_1	d_3	d_4	d_6	d_7	b_1	b_3
PM 17	-01	-501	17	M 20 x 1,5	21,0	48	26	22	16

type	measurements [mm] l_1	l_2	l_3	h_1	h_2	u	z	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
PM 17	36		36	78,5		3,5	2,5	7,0	0,354	2,35	2,46	875	5575	2680

123BEARING

CARACTERÍSTICAS DO PRODUTO

Marca	DURBAL
N° Ean13	3663952507699
Diâmetro interior	17 mm
Diâmetro exterior	48 mm
Espessura	22 mm
Tipo	SA
Peso	354 g
Linha	Rosca direita
Lubrificação	com
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE