Rótula SA
BRM06-60-502-DURBAL - BRM06-60-502-DURBAL

https://www.123rolamento.pt/rolamento-mancal/rotula/sa/brm06-60-502-durbal

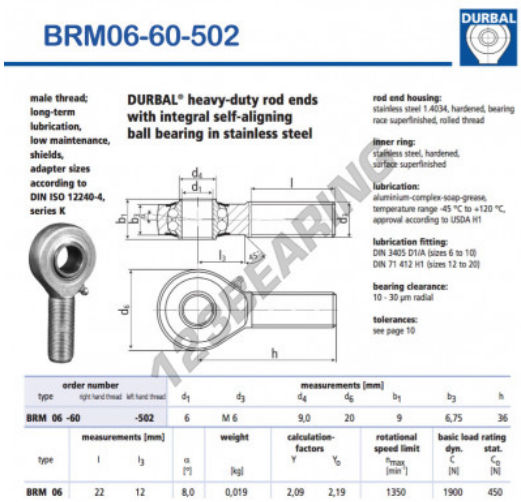

BRM06-60-502

DURBAL

male thread; long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing in stainless steel

rod end housing: stainless steel 1.4034, hardened, bearing race superfinished, rolled thread

inner ring: stainless steel, hardened, surface superfinished

lubrication: aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting: DIN 3405 D1/A (sizes 6 to 10) DIN 71 412 H1 (sizes 12 to 20)

bearing clearance: 10 - 30 µm radial

tolerances: see page 10

order number type	right hand thread	left hand thread	measurements [mm] d_1	d_3	d_4	d_6	b_1	b_3	h
BRM 06 -60		-502	6	M 6	9,0	20	9	6,75	36

type	measurements [mm] l	l_3	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
BRM 06	22	12	8,0	0,019	2,09	2,19	1350	1900	450

CARACTERÍSTICAS DO PRODUTO

Marca	DURBAL
N° Ean13	3663952509099
Diâmetro interior	6 mm
Diâmetro exterior	20 mm
Espessura	9 mm
Tipo	SA
Peso	19 g
Linha	Rosca esquerda
Lubrificação	com
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE