


## Casquilho de agulhas BA168-Z-IKO - BA168-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba168-z-iko>

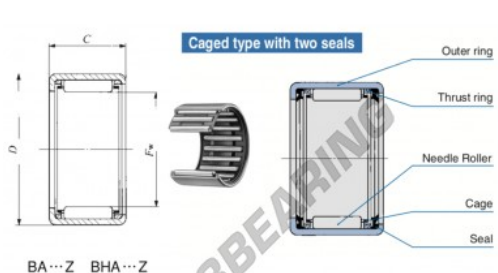

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$P_{10}$	$D$	$C$	$c_2$	$b_6$	$J$	$C$	$C^*$			
			Max.	Min.	Max.	Min.	N	N	rpm	
25.400	(1.01.790)	(11.41)	12.700	8.000	2.8		8.240	12000	15000	IRB

### CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601162
Diâmetro interior	25.4 mm
Diâmetro exterior	31.75 mm
Espessura	12.7 mm
Velocidade-limite	15000 rpm
Carga dinâmica	8.24 kN
Carga estática	12000 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE