


Casquilho de agulhas

BA1612-Z-IKO - BA1612-Z-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba1612-z-iko

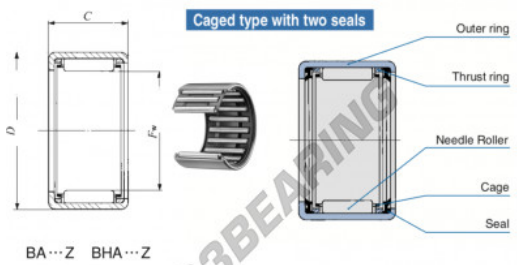

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled lower ring
Pw	D	C	h6	H7	h6	H7	C	C'	speed(r)	
25.400 (1.0)	31.750 (1.25)	19.050 (.750)	Max.	Max.	Min.	Max.	Min.	N	N	rpm
								14200	24300	15000(RB 1212)

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601186
Diâmetro interior	25.4 mm
Diâmetro exterior	31.75 mm
Espessura	19.05 mm
Velocidade-limite	15000 rpm
Carga dinâmica	14.2 kN
Carga estática	24.3 kN
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE