


Casquilho de agulhas BA1616-Z-IKO - BA1616-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba1616-z-iko>

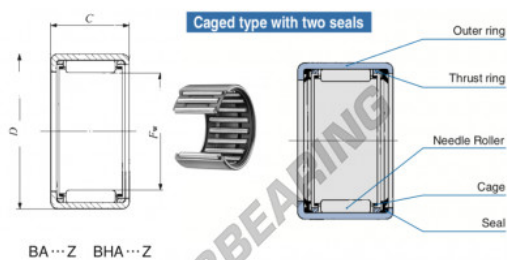

Boundary dimensions		mm(inch)		Standard mounting dimensions				mm		Basic dynamic	Basic static	Allowable	Assembled
F_w	D	C	C_2	Shaft dia.	Housing bore dia.	JT	C	CP	load rating	load rating	rotational speed ⁽¹⁾	inner ring	
	Max.	Max.	Min.	Max.	Min.		N	N	rpm				
25.400 (1)	31.750 (1.14)	25.40(1.000)	2.8				19400	36300	15000	RB 1218			

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601209
Diâmetro interior	25.4 mm
Diâmetro exterior	31.75 mm
Espessura	25.4 mm
Velocidade-limite	15000 rpm
Carga dinâmica	19.4 kN
Carga estática	36.3 kN
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE