


## Casquilho de agulhas BA1820-Z-IKO - BA1820-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba1820-z-iko>

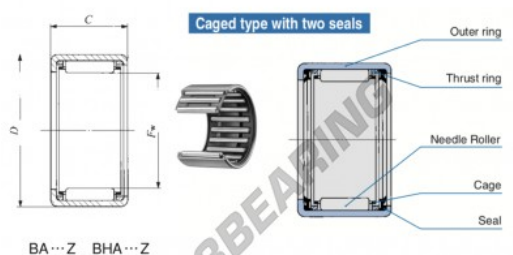

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring	
<i>F<sub>w</sub></i>	<i>D</i>	<i>C</i>	<i>d<sub>2</sub></i>	Shaft dia. Int.	Housing bore dia. <i>d<sub>1</sub></i>	<i>C</i>	<i>C<sub>0</sub></i>	rpm		
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
28.575 (1.124)	34.925 (1.375)	31.75 (1.250)	2.8	28.575	28.962	34.939	34.914	25700	52900	13000 (RB 1420)

### CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601285
Diâmetro interior	28.575 mm
Diâmetro interior	1 1/8" inch
Diâmetro exterior	34.925 mm
Diâmetro exterior	1 3/8" inch
Espessura	31.75 mm
Espessura	1 1/4" inch
Velocidade-limite	13000 rpm
Carga dinâmica	25.7 kN
Carga estática	53.9 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE