


Casquilho de agulhas BA4216-Z-IKO - BA4216-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba4216-z-iko>

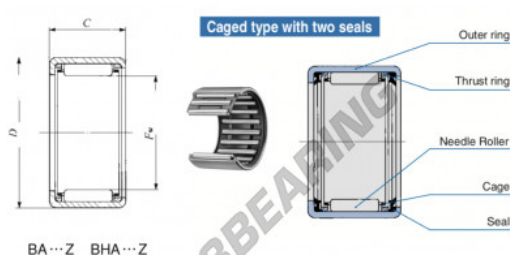

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed		Assembled inner ring
F_w	D	C	d	h_0	B	C_1	C_2	N	N_0	rpm	rpm	rpm	mm
66.675 (2 5/8)	76.200 (3)	25.400 (1.000)	2.0	66.675 (2 5/8)	66.675 (2 5/8)	75.210 (2 11/16)	75.180 (2 11/16)	42000	87900	4000	4000	3616	3616

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601643
Diâmetro interior	66.675 mm
Diâmetro exterior	76.2 mm
Espessura	25.4 mm
Velocidade-limite	4000 rpm
Carga dinâmica	42 kN
Carga estática	97.9 kN
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE