


## Casquilho de agulhas BA68-Z-IKO - BA68-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba68-z-iko>

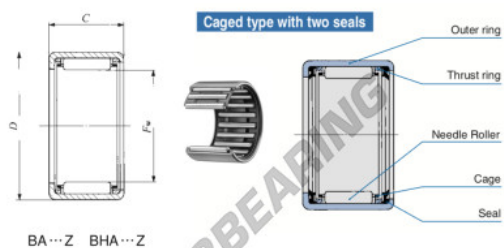

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable speed	Assembled inner ring	Assembled outer ring
$F_w$	$D$	$C$	$d_2$	$td$	$d_1$	$d_2$	$C$	$C_0$	rpm		
Max	Max	Min	Max	Min	Max	Min	N	N	rpm		
9.525 (3/8)	14.288 (1/2)	12.7 (500)	1	9.525	9.516	14.288	14.280	4.19	4500	40000	—

### CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060601773
Diâmetro interior	9.525 mm
Diâmetro exterior	14.288 mm
Espessura	12.7 mm
Velocidade-limite	40000 rpm
Carga dinâmica	4.19 kN
Carga estática	4.56 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE