


Casquilho de agulhas BA912-Z-IKO - BA912-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba912-z-iko>

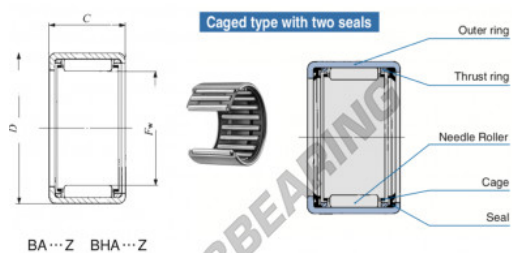

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed ⁽¹⁾ | Assembled inner ring |
|------------------------------|-------------|-------------|---------------------------------|-------|------|------|---------------------------|--------------------------|---|----------------------|
| F_w | D | C | d_2 | b_2 | JT | C | C_0 | rpm | | |
| | | | Max. | Min. | Max. | Min. | N | N | RB 612 | |
| 14.288 (16) | 19.05 (4.4) | 19.05 (7.5) | 1.5 | | | | 8.69 | 13000 | 30000 | |

CARACTERÍSTICAS DO PRODUTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3616060602930 |
| Diâmetro interior | 14.288 mm |
| Diâmetro exterior | 19.05 mm |
| Espessura | 19.05 mm |
| Velocidade-limite | 30000 rpm |
| Carga dinâmica | 8.69 kN |
| Carga estática | 13 kN |
| Embalagem | 1 |

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE