


## Casquilho de agulhas BA108-Z-IKO - BA108-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba108-z-iko>

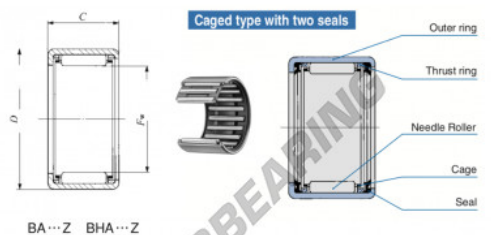

Boundary dimensions mm(inch)		Standard mounting dimensions mm		Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembly inner ring
$F_w$	$D$	$C$	$\frac{D}{d}$	$d$	$C$	$C_0$	
				Min.	Max.	Min.	Max.
15.875 (5/8)	20.638 (81/64)	12.7 (500)	1.3			5420	7310 25000 (R9 68-1)

## CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060602954
Diâmetro interior	15.875 mm
Diâmetro exterior	20.638 mm
Espessura	12.7 mm
Velocidade-limite	25000 rpm
Carga dinâmica	5.42 kN
Carga estática	7.31 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE