


## Casquilho de agulhas BA1012-Z-IKO - BA1012-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba1012-z-iko>

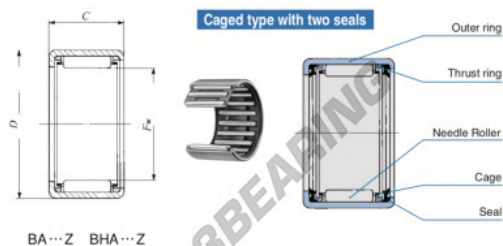

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring	
$F_w$	$D$	$C$	$d_2$	$h_6$	Housing bore dia.	$C$	$C_0$	rpm	inner ring	
15.875 (5/8)	20.638 (81/64)	19.05 (750)	1.3	15.875 (5/8)	19.264	20.625 (81/64)	20.625	9000	14100	25000 (RB 612-1)

## CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060602978
Diâmetro interior	15.875 mm
Diâmetro exterior	20.638 mm
Espessura	19.05 mm
Velocidade-limite	25000 rpm
Carga dinâmica	9.02 kN
Carga estática	14.1 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE