


## Casquilho de agulhas BA710-Z-IKO - BA710-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba710-z-iko>

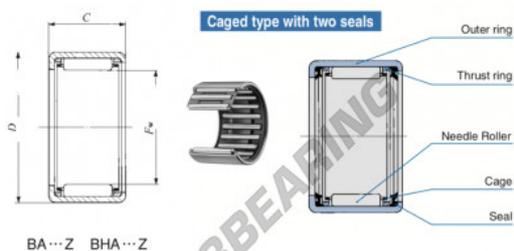

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H_0$	$J$	$C$	$C_0$			
			Max.	Min.	Max.	Min.	Min.	rpm		
11.112 (0.44)	15.875 (0.625)	12.700 (0.500)	11.112	11.101	15.865	15.867	4490	5130	35000	

### CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060603036
Diâmetro interior	11.112 mm
Diâmetro exterior	15.875 mm
Espessura	12.7 mm
Velocidade-limite	35000 rpm
Carga dinâmica	4.46 kN
Carga estática	5.13 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE