


## Casquilho de agulhas BA1214-Z-IKO - BA1214-Z-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/ba1214-z-iko>

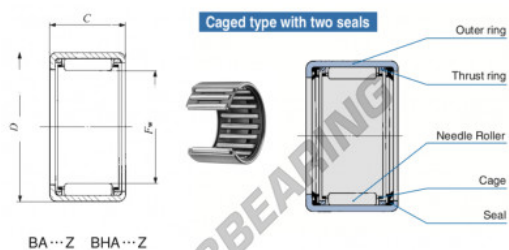

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H_0$	$J_1$	$C$	$C_0$	$N$	$N_0$	rpm		
19.990 (0.41)	25.400 (1)	22.221 (0.875)	1.3	19.050	19.037	25.412	25.391	14200	22200	20000	RB #14-1	

## CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060603197
Diâmetro interior	19.05 mm
Diâmetro exterior	25.4 mm
Espessura	22 mm
Velocidade-limite	20000 rpm
Carga dinâmica	14 kN
Carga estática	22 kN
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE