Casquilho de agulhas
BAM1414-IKO - BAM1414-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/casquilho-agulhas/bam1414-iko

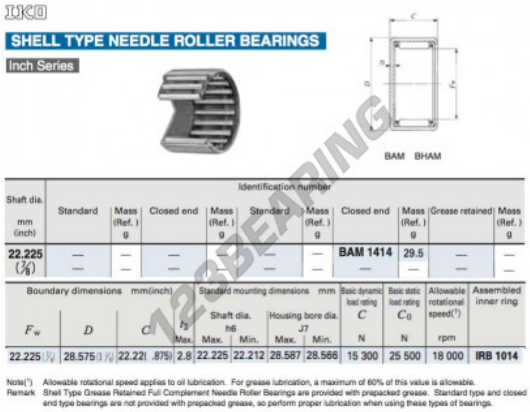

IKO

SHELL TYPE NEEDLE ROLLER BEARINGS

Inch Series

BAM BHAM

Shaft dia. mm (inch)	Identification number: Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
22.225 (7/8)	— —	— —	— —	— —	— —	— —	BAM 1414 —	29.5 —	— —	— —

Boundary dimensions mm(inch) F_w	D	C	r_s Max.	Standard mounting dimensions mm: Shaft dia. h6 Max.	Shaft dia. h6 Min.	Housing bore dia. J7 Max.	Housing bore dia. J7 Min.	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed(1) rpm	Assembled inner ring
22.225 (7/8)	28.575 (1 1/8)	22.22 (.875)	2.8	22.225	22.212	28.587	28.566	15 300	25 500	18 000	IRB 1014

Note(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.
Remark Shell Type Grease Retained Full Complement Needle Roller Bearings are provided with prepacked grease. Standard type and closed end type bearings are not provided with prepacked grease, so perform proper lubrication when using these types of bearings.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
N° Ean13	3663952173146
Diâmetro interior	22.23 mm
Diâmetro exterior	28.58 mm
Espessura	22.22 mm
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE