


Rolamento cónico 681A-672-TIMKEN - 681A-672-TIMKEN

<https://www.123rolamento.pt/rolamento-mancal/rolamento-rolos/conico/681a-672-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

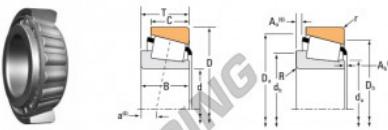

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|-------------------|------------------|---------------------------------------|-------------------------|---------------------------------------|--------------------------------------|-----------------------|-------|-----------------|-------------|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynamic ⁽¹⁾ C ₂ | Factor ⁽²⁾ e ₂ | Static C ₀ | Inner | Outer | |
| mm | mm | mm | N | | N | N | N | | | |
| 92.075 9.0250 | 168.275 8.8250 | 41.275 1.6250 | 205000 59500 | 0.47 | 1.28 | 68000 15400 | 95300 12400 | 1.24 | 390000 90700 | 681A 672 |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight |
|--------------------|------------------|--------------------------|--|--------------------------------------|--|--------------------------------------|------------------------------------|-------------------------------|----------------|------------------|----------------|----------------|----------------|
| Width B | Width C | ER. Dr. e ⁽¹⁾ | Max Shaft Fillet Radius r ⁽¹⁾ | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ⁽²⁾ | Backing Shoulder Dia. D _s | Cage A ₁ ⁽³⁾ | A ₂ ⁽³⁾ | G ₁ | G ₂ | C ₃ | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | |
| 41.275 1.6250 | 95.982 1.1875 | -2.8 -0.11 | 6.4 0.25 | 198.0 4.00 | 116.0 4.57 | 3.3 0.13 | 160.0 9.30 | 140.0 5.87 | 4.8 0.19 | 2.1 0.08 | 182.5 37.3 | 0.1056 3.82 | 3.82 8.41 |

CARACTERÍSTICAS DO PRODUTO

| | |
|-------------------|---------------|
| Marca | TIMKEN |
| Nº Ean13 | 3663952220611 |
| Diâmetro interior | 92.08 mm |
| Diâmetro exterior | 168.28 mm |
| Espessura | 41.28 mm |
| Embalagem | 1 |

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE