Rolamento de agulhas
BRI162820-UU-IKO - BRI162820-UU-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/bri162820-uu-iko

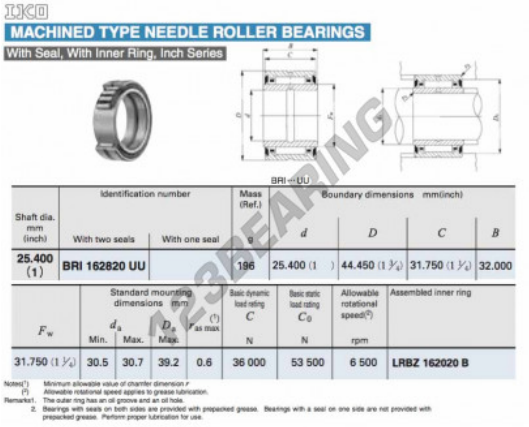

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, With Inner Ring, Inch Series

BRI-UU

Shaft dia. mm (inch)	Identification number: With two seals	Identification number: With one seal	Mass (Ref.) g	Boundary dimensions mm(inch) d	D	C	B
25.400 (1)	BRI 162820 UU		196	25.400 (1)	44.450 (1 1/4)	31.750 (1 1/4)	32.000

F_w	Standard mounting dimensions mm d_a Min.	d_a Max.	D_a Max.	r_{as} max (1)	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed(2) rpm	Assembled inner ring
31.750 (1 1/4)	30.5	30.7	39.2	0.6	36 000	53 500	6 500	LRBZ 162020 B

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

123BEARING

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
N° Ean13	3663952382579
Diâmetro interior	25.4 mm
Diâmetro exterior	44.45 mm
Espessura	31.75 mm
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE