


Rolamento de agulhas GBRI568032-UU-IKO - GBRI568032-UU-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri568032-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

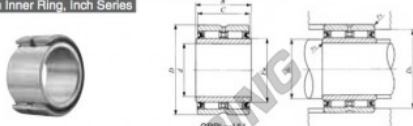

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
88.900 (3 1/2)	GBRI 568032 UU		2 130	88.900 (3 1/2)	127.000 (5)	50.800 (2)			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		d _{min}	d _{max}	D _s Max.					r _{as max} ⁽¹⁾
51.050	101.600 (4)	97	99	119	1.5	182 000	395 000	800	LRBZ 566432

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952383644
Diâmetro interior	88.9 mm
Diâmetro exterior	127 mm
Espessura	50.8 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE