


Rolamento cónico

LL244549-LL244510-TIMKEN - LL244549-LL244510-TIMKEN

<https://www.123rolamento.pt/rolamento-mancal/rolamento-rolos/conico/ll244549-ll244510-timken>

TAPERED ROLLER BEARINGS
SINGLE ROW • TYPE TS

TYPE TS

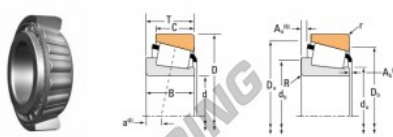

Bearing Dimensions			Load Ratings					Part Number	
Bore d	O.D. D	Width B	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽¹⁾ C ₂	Factor ⁽²⁾ C _{2e}	Static C ₃	Inner	Outer
mm	mm	mm	N		N	N	N		
231.775 9.1250	268.288 10.5625	22.500 0.8868	146000 22600	0.33 1.25	37900 9020	27000 4950	1.78 76000	LL244549	LL244510

Bearing Dimensions										Geometry Factors			Bearing Weight		
Shaft		Housing		Cage					G ₁	G ₂	C ₃				
Width B	Width C	ER. Dr. r ⁽¹⁾	Max Shaft Fillet Radius R ⁽¹⁾	Backing Shoulder Dia. d ₁	Max Housing Fillet Radius r ⁽¹⁾	Backing Shoulder Dia. D ₁	A ₁ ⁽¹⁾	A ₂ ⁽¹⁾							
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg		
21.500	18.500	15.7	2.8	237.0	241.8	2.8	263.8	258.8	8.2	2.4	0.01	0.10	0.515	0.1422	1.85
0.8465	0.7283	0.62	0.08	9.33	9.49	0.08	10.35	10.20	0.32	0.09					4.89

CARACTERÍSTICAS DO PRODUTO

Marca	TIMKEN
Nº Ean13	3663952327730
Diâmetro interior	231.775 mm
Diâmetro interior	9 1/8" inch
Diâmetro exterior	268.288 mm
Diâmetro exterior	10 9/16" inch
Espessura	22.5 mm
Espessura	0.886" inch
Peso	1850 g
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE