


Rolamento com rótula sobre esferas 1209-K-TVH-C3-H209-FAG - 1209-K-TVH-C3-H209-FAG

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rotula-esferas/1209-k-tvh-c3-h209-fag>

Self-aligning ball bearings 1209-K-TVH-C3 + H209
main dimensions to DIN 630 and DIN 5415, with tapered bore and adapter sleeve

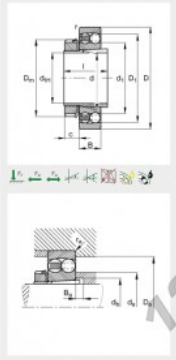

d_{int}	40 mm
D	85 mm
B	19 mm
B_{sleeve}	5 mm
e	12 mm
D_1	72.7 mm
$D_{2,max}$	78 mm
$D_{2,min}$	60 mm
d	45 mm
d_1	57.7 mm
$d_{2,max}$	52 mm
$d_{2,min}$	40 mm
l	33 mm
r_{axial}	1 mm
r_{ext}	H209 Mass, adapter sleeve
m	0,454 kg Mass
m_1	0,22 kg Mass, adapter sleeve
C_r	22000 N Basic dynamic load rating, radial
e	0,21
Y_1	3,04
Y_2	4,7
C_0	7300 N Basic static load rating, radial
Y_0	3,18
n_c	9000 1/min Limiting speed
n_R	11100 1/min Reference speed
C_{10}	455 N Fatigue limit load, radial

CARACTERÍSTICAS DO PRODUTO

Marca	FAG
Nº Ean13	3663952346205
Diâmetro interior	40 mm
Diâmetro exterior	85 mm
Espessura	19 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE