Rolamento de agulhas
RNA69-28-U-IKO - RNA69-28-U-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/rna69-28-u-iko

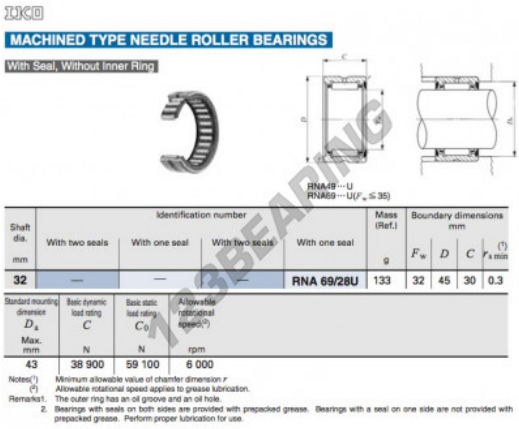

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring

RNA69···U
RNA69···U(F_w ≤ 35)

Shaft dia. mm	Identification number: With two seals	With one seal	With two seals	With one seal	Mass (Ref.) g	Boundary dimensions mm: F_w	D	C	$r_{s\,min}$ (1)
32	—	—	—	RNA 69/28U	133	32	45	30	0.3

Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (2) rpm
43	38 900	59 100	6 000

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

123BEARING

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
N° Ean13	3663952379074
Diâmetro interior	32 mm
Diâmetro exterior	47 mm
Espessura	30 mm
Embalagem	1

contato@123rolamento.pt
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE