


Rolamento de agulhas GBR1243720-UU-IKO - GBR1243720-UU-IKO

https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/agulhas/gbri243720-uu-iko

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

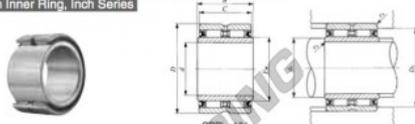

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
38.100 (1 1/2)	GBR1 243720 UU		330	38.100 (1 1/2)	58.738 (2 1/4)	31.750 (1 1/4)			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
32.000	44.450 (1 3/4)	43.3	43.4	53.7	0.6	58 900	114 000	1 800	LRBZ 242820

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952383446
Diâmetro interior	38.1 mm
Diâmetro exterior	58.738 mm
Espessura	31.75 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE