


Rolo de leva com eixo CFES8-BR-IKO - CFES8-BR-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/cfes8-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

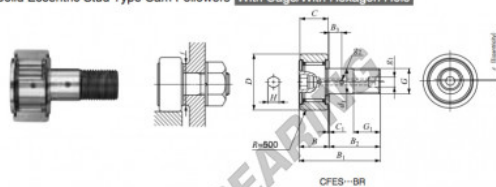

Stud dia. mm	Identification number						Mass (Ref.) g	D	C	d _i						
	Shield type		Sealed type													
8	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With crowned outer ring	With cylindrical outer ring	With cylindrical outer ring	28.5	19	11	8						
	CFES	8	BR													
Boundary dimensions mm																
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M 8×1.25	10	12.2	32.2	20	—	0.6	—	—	4	0.3	0.25	13	6.5	4 250	4 740	4 670

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952443409
Diâmetro interior	8 mm
Diâmetro exterior	19 mm
Espessura	11 mm
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE