


Rolo de leva com eixo CFE24-1-VUUR-IKO - CFE24-1-VUUR-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/cfe24-1-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

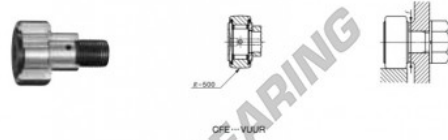

Outside diameter of eccentric roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
33	CFE 24-1 VUUR				1 220	72	29	33

Boundary dimensions mm										
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ _{min}	Excentricity E	Mounting dimension f Min. mm
M24 x 1.5	25.5	30.6	80.1	49.5	0.8	8	24	1	0.8	40

Maximum operating torque	Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load
N·m	N	N	N
215	46 800	92 000	52 000

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3616060461285
Diâmetro interior	33 mm
Diâmetro exterior	72 mm
Espessura	29 mm
Peso	1220 g
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE