


Rolo de leva com eixo CRH14-VR-IKO - CRH14-VR-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-esferas/rolo-leva-eixo/crh14-vr-iko>

IKO
CAM FOLLOWERS
Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

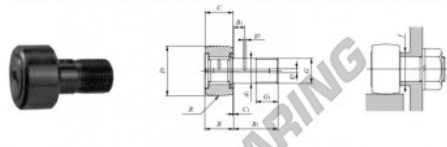

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	Dimensions						
	Shield type	Sealed type		D	C	d_1	G UNF	G_1	B max	
11.112 ($\frac{7}{16}$)	CRH 14 VR		49	22.225 ($\frac{7}{8}$)	12.700 ($\frac{1}{2}$)	11.112 ($\frac{7}{16}$)	$\frac{1}{8}$ -20	9.525 ($\frac{3}{8}$)	14.6 (5.7)	

Boundary dimensions mm(inch)							Mounting dimension f Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C_0 N
B_2	B_3	C_1	S_1	S_2	R					
22.225 ($\frac{7}{8}$)	6.350 ($\frac{1}{4}$)	6.754 ($\frac{9}{32}$)	4.762 ($\frac{3}{16}$)	2.381 ($\frac{3}{32}$)	250 (3)	13.484 ($\frac{11}{16}$)	17.8	8 710	12 300	

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952463056
Diâmetro interior	11.112 mm
Diâmetro exterior	22.225 mm
Espessura	12.7 mm
Peso	49 g
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE