


Batente de agulhas AZK15283.5-IKO - AZK15283.5-IKO

<https://www.123rolamento.pt/rolamento-mancal/rolamento-agulhas/batente-agulhas/azk15283.5-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

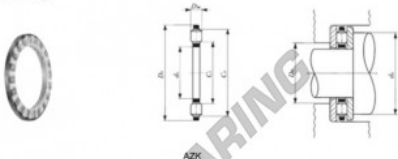

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
15	AZ 15289	28	AZK 15283.5	9.4	WS 1528	GS 1528		9.3

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
15	28	9	15.04	27.8	3.5	2.75	0.3	17	25	25	18	10 200	23 900	14 000

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARACTERÍSTICAS DO PRODUTO

Marca	IKO
Nº Ean13	3663952486833
Diâmetro interior	15 mm
Diâmetro exterior	28 mm
Espessura	3.5 mm
Peso	9.4 g
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE