

## Rótula TAPR GIHN-K-16LO-DURBAL - GIHN-K-16LO-DURBAL


<https://www.123rolamento.pt/rolamento-mancal/rotula/tapr/gihn-k-16lo-durbal>

### GIHN-K-16LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

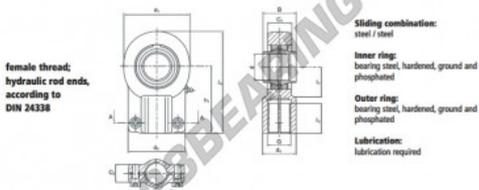

female thread; hydraulic rod ends, according to DIN 24338

Sliding combination: steel / steel  
Inner ring: bearing steel, hardened, ground and phosphated  
Outer ring: bearing steel, hardened, ground and phosphated  
Lubrication: lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 16 LO	16	40	M 14 x 1,5	21,0	40	16	14 14

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>1</sub>	load rating C <sub>0</sub> [kN]	weight [kg]
GIHN-K / GIHN-KL 16 LO	19	44	64,0	18	36,5	0,20

## CARACTERÍSTICAS DO PRODUTO

Marca	DURBAL
Nº Ean13	3663952500072
Diâmetro interior	16 mm
Diâmetro interior	0.63" inch
Diâmetro exterior	40 mm
Diâmetro exterior	1.575" inch
Espessura	14 mm
Espessura	0.551" inch
Tipo	TAPR
Peso	200 g
Linha	Rosca direita
Lubrificação	com
Embalagem	1

[contato@123rolamento.pt](mailto:contato@123rolamento.pt)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE