

Rótula TAPR GIHN-KL-20LO-DURBAL - GIHN-KL-20LO-DURBAL


<https://www.123rolamento.pt/rolamento-mancal/rotula/tapr/gihn-kl-20lo-durbal>

GIHN-KL-20LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

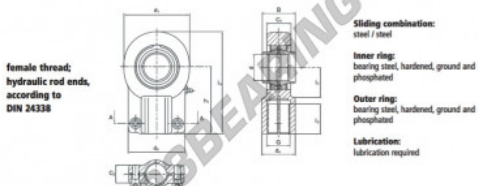

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	d ₂	B	C ₁	C ₂
GIHN-KL 20 LO	20	47	M 16 x 1,5	25,0	47	20	17

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
GIHN-K / GIHN-KL 20 LO	23	52	77,0	22	48,0	0,40

CARACTERÍSTICAS DO PRODUTO

Marca	DURBAL
Nº Ean13	3663952500119
Diâmetro interior	20 mm
Diâmetro exterior	47 mm
Espessura	17 mm
Tipo	TAPR
Peso	400 g
Linha	Rosca esquerda
Lubrificação	com
Embalagem	1

contato@123rolamento.pt

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE